



CABLE TO BE PLUGGED INTO "PL 2" LOCATED ON THE BOTTOM OF THE CONTROL UNIT PRINTED CIRCUIT BOARD

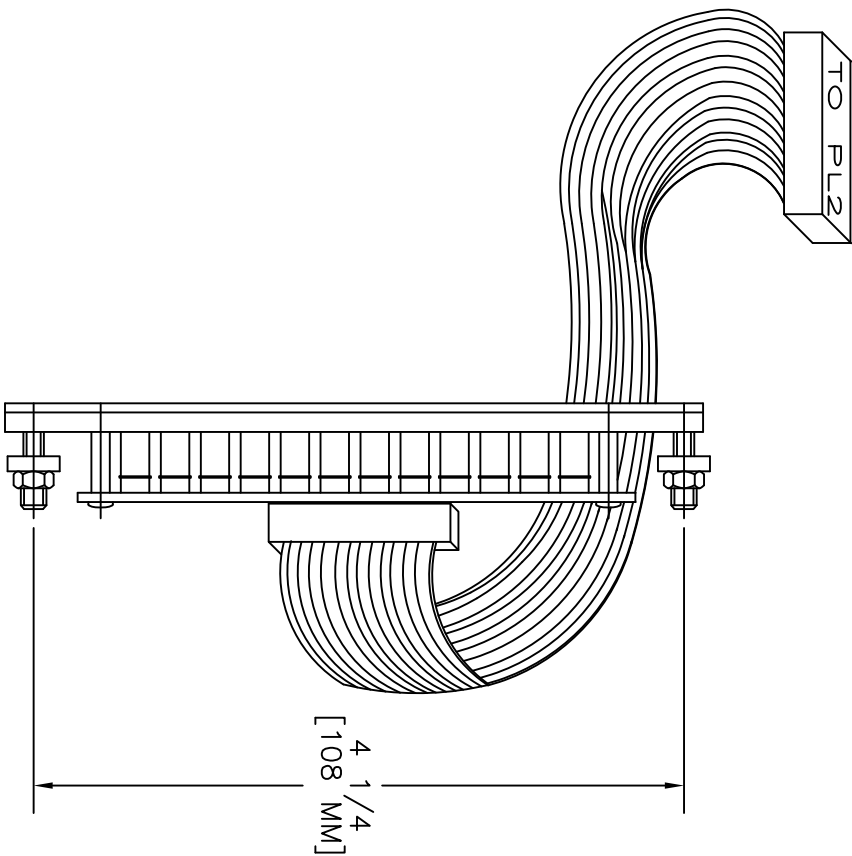

- 1) INDICATOR TO BE MOUNTED ON THE FRONT OF THE CONTROL UNIT ENCLOSURE DOOR.
- 2) WHEN NEMA 4 OR NEMA 4X ENCLOSURE IS FURNISHED, THE SMI-36 GASKET MUST BE PLACED BETWEEN THE BACK OF THE INDICATOR AND THE FRONT OF THE ENCLOSURE DOOR

BILL OF MATERIAL			DWG. NO.
QTY	PART NO.	DESCRIPTION	
1	SMI-30	BI-COLOR L. E. D. INDICATOR ASSY	
		WITH 24' LG. RIBBON CABLE-12V DC	
1	SMI-35	NAMEPLATE	E17117-A
1	SMI-36	GASKET - FOR USE WITH NEMA 4	E17133-A

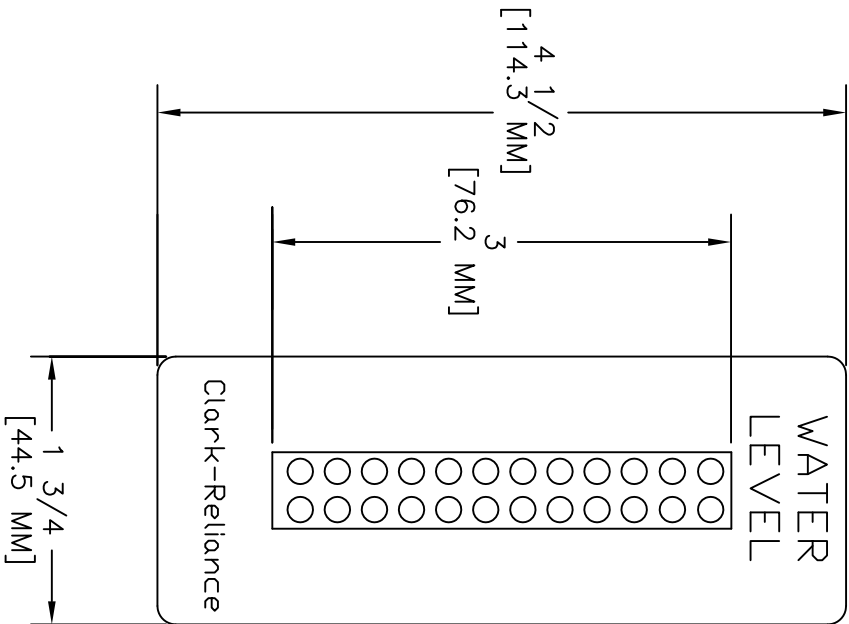

REV	DESCRIPTION	DATE	SIG
1	ADDED METRIC DIMS	11/17/06	MJG
	REVISIONS		

UNLESS OTHERWISE NOTED:		MATERIAL	
DECIMAL & STOCK	(.002)	DRAWN	ST
FIN. FRACTIONAL (UP TO 1', NOT INCL.)	(.010)	CHKD.	SCALE NONE
FIN. FRACTIONAL (1' INCL., UP TO 3')	1/64	DATE	7-11-96
FIN. FRACTIONAL (3' INCL., UP TO 6')	1/32	DRAWING NO.	REV.
FIN. FRACTIONAL (6' INCL., UP TO 12')	1/16	E11118-A	1
FIN. FRACTIONAL (12' & OVER)	1/8		
ANGLES	1°		
MACHINE FINISH-	125° DR SMOOTHER		
REMOVE BURRS AND SHARP EDGES			

THE CLARK-RELIANCE CORP.

STRONGSVILLE, OHIO

RSMI-12BD

DOOR MOUNTED INDICATOR