

Suitable for all mineral-based and synthetic hydraulic, lubrication, and fuel oil applications, premium pleated microglass media maximizes surface area, dirt holding capacity, and service life while minimizing single pass particle counts, differential pressure, and cost of ownership.




2200A		4	-	-	*
<b>Media Type</b> Pleated Microglass with Polypropylene Sleeve	<b>Dimensions</b> 3.775" OD x 26.00" Long (with spring compressed)	<b>Micron Rating**</b> 2 = 6 µm 3 = 12 µm 4 = 25 µm 6 = 25 µm (5.932" OD)	<b>Special</b> SS = Stainless Steel STX = Anti-Static		
<b>Seal Type</b> O-ring	<b>End Cap Configuration</b> Single Open End with Spring				
<b>Seal Material</b> FKM	<b>Core &amp; Cap Material</b> Plated Steel				

\* Filters using the special field will include a three digit code. *Example 2200A4-001*

\*\*Beta > 200 (99.5% for stated micron size)

### Recommended Operating Conditions

<b>Flow Direction</b>	Outside → In
<b>Change Out Differential</b>	25 PSID
<b>Collapse Pressure</b>	150 PSID
<b>Maximum Temperature</b>	250° F

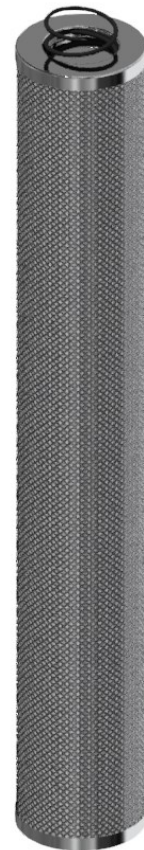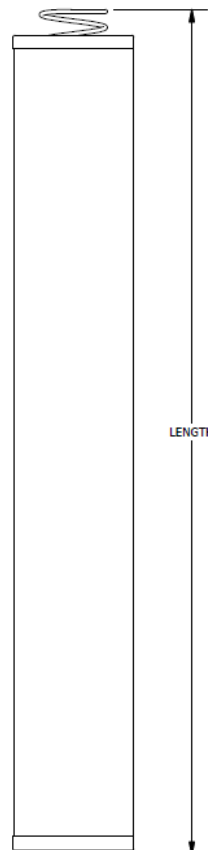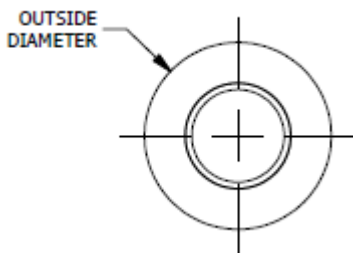

For more information, email [PurityProducts@clark-reliance.com](mailto:PurityProducts@clark-reliance.com)

ANDERSON®  
Separator

Clark-Reliance  
FILTER ELEMENTS®

Enervac™  
INTERNATIONAL ULC

OIL  
FILTRATION  
SYSTEMS®

NFS  
National  
Filtration  
Systems®

HYCOA®